PLEASE READ THIS MANUAL CAREFULLY TO ENSURE SAFE USAGE AND MAINTENANCE

How to assemble this commode

1. Before assembling seat and lid, ensure they reach room temperature to prevent cracking.
2. Align the toilet seat clamps with the back of the frame rail. Push down on seat until the clamps snap firmly in place.
3. Align the lid with back of the frame rail and push down firmly to snap in place.
4. When removing the seat, always remove the lid first. Firmly hold onto the lid and lift.
5. Install commode bucket by placing the splash guard between the bucket frames.
6. When removing bucket, lift splashguard and bucket from bucket frame.

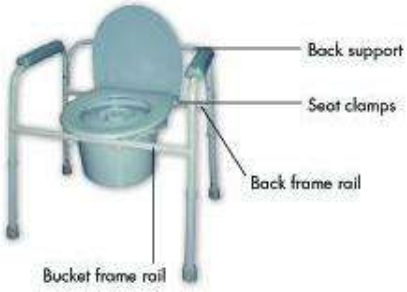

How to adjust leg height

1. Push snap button on legs and set height of leg to your specific needs. Lock legs in place by releasing button,
2. Set all legs to the same height that matches your specific needs.
3. Ensure all legs are in place by pushing down on commode or pulling legs.

Precautions

1. Do not install this commode without reading this manual. If you do not understand these instructions then contact your dealer for additional assistance.
2. Toilet seat must be down before use, otherwise the commode may break and this may lead to injury.
3. Inspect the commode before assembly. If there is any appearance of damage, DO NOT USE. Contact your dealer for additional assistance.
4. Ensure all snap buttons protrude through each hole and lock the height in place.
5. Ensure all screws, nuts and bolts are tightened.
6. Check all rubber tips and components for any tears. Replace immediately if any imperfections appear.
7. Ensure all rubber tips on the leg extensions touch the floor evenly at all times.
8. Use this commode with assistance and supervision if you have limited physical strength.